

MG-TAP

Legends 15 mm

precut

MG-TAP legends are particularly versatile for identifying cables, conduit, push buttons, machinery, components, etc.

Consult us for availability of other colours.

Note: UV resistance may vary between colours.



Material: Rigid PVC, self extinguishing class V0 according to UL94; the colours white PVC10050WH and yellow PVC10050YE are UL approved.

Operating temperature range: -30°C to +60°C



Family	Size mm	Type								Quantity	Legends per sheet	SW code	
		white PVC10050WH	yellow PVC10050YE	grey	red	blue	green	Siemens green	black				
MG-TAP	15 x 17	47090N	47040N	47000NGY	47020N	47060N	47050N		47010N	1.050	42	165	
	15 x 27	47091N	47041N	47001NGY	47021N	47061N	47051N	47051NSGN	47011N	1.400	28	166	
		47091N								4.200			
	15 x 32	47098								1.050	21	352	
	15 x 43	47198								700	14	353	
	15 x 49	47091N	47042N	47002NGY	47022N	47062N	47052N		47012N	700	14	167	
		47091N		47002NGY						2.100			
	15 x 67	47093	47043	47003GY	47023	47063	47053		47013	350	14	188	
		47093								1.050			
	Siemens 3SB3925-0AB												
		17,5 x 27,8	47094		47004GY					47014	1.200	24	175
	Schneider Electric ZBY, Telemecanique ZBZ-32, Omron												
		8,2 x 27	47096	47046	47006GY	47026				47016	2.200	44	807
	Schneider Electric ZBY, Telemecanique ZBZ-33, ZBZ-35, Klöchner Moeller (EATON)												
		18 x 27	47097	47047	47007GY	47027				47017	1.000	20	178
	Allen Bradley												
		6,4 x 27,3	47790		47700GY						1.400	56	715
		16,3 x 27,3	47791		47701GY						1.200	24	716
Siemens 3SU1900-OAS10-OAA0 with rounded corners													
	17,5 x 27	47797	47747	47707GY						450	9	971	
Entrelec KA1-8120													
	15 x 27,7	47795	47745	47705GY						1.400	28	163	



template with PET support.....	page 12
ribbons.....	page 13
legend holders PMF-ET.....	page 126

legend holders PMT-AC.....	page 127
push button legend bases PTP.....	page 140
legend bases PL.....	page 141
legend rails RT-TAP.....	page 144



MG-TAP

Legends 15 mm

precut, halogen free



MG-TAP-HF

Material: Polycarbonate, Halogen Free, self extinguishing class V0: according to UL94; the colour white PC10050WH is EN 45545-2 approved.

Operating temperature range: -40°C to +130°C




Family	Size mm	Type			Legends per sheet	Quantity	SW code	
		white PC10050WH	metallic grey	transparent				
MG-TAP-HF	15 x 17		47000N-HF	990508N	42	1.050	165	
	15 x 27	47091N-HF	47001N-HF	990510N	28	1.400	166	
	15 x 49		47002N-HF	990513N	14	700	167	
	15 x 67	47093-HF	47003-HF	990514	14	350	188	
	Entrelec KAI-8120							
	15 x 27,7		47705-HF		28	1.400	163	
	Siemens 3SB3925-0AB							
	17,5 x 27,8		47004-HF	990499	24	1.200	175	
	Schneider Electric ZBY, Telemecanique ZBZ-32, Omron							
	8,2 x 27		47006-HF	990515	44	2.200	807	
	Schneider Electric ZBY, Telemecanique ZBZ-3, ZBZ-35,ZBY6102, Klöchner Moeller (EATON)							
	18 x 27		47007-HF		20	1.000	178	
	Allen Bradley							
	6,4 x 27,3		47700-HF		56	1.400	715	
	16,3 x 27,3		47701-HF		24	1.200	716	
	Siemens 3SU1900-0AS10-0AA0 with rounded corners							
17,5 x 27	47797-HF	47707-HF		9	450	971		



Use the 991611 ribbon to print FLAT Polycarbonate items
 template with PET support page 12
 ribbons page 13
 legend holders PMF-ET page 126

legend holders PMT-AC page 127
 push button legend bases PTP page 140
 legend bases PL page 141
 legend rails RT-TAP page 144




Legends 15 mm

precut, rigid

Cable tags rigid, thickness 1 mm, are particularly versatile for identifying cables, conduit, push buttons, machinery, components, etc.

MG-TAP

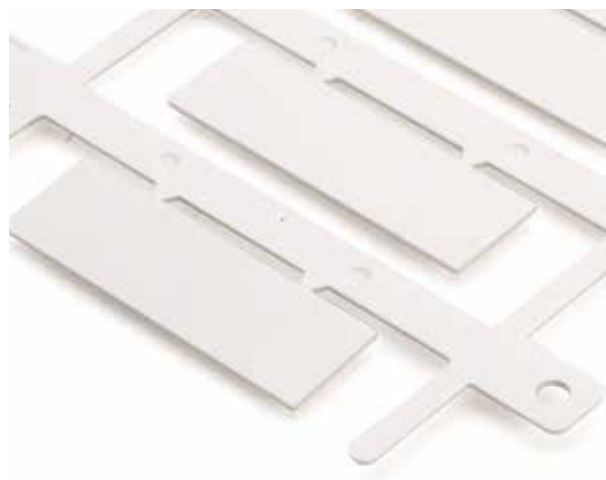

MG-TAP-HF

NEW

Material: Polycarbonate, Halogen Free, self extinguishing class V0: according to UL94; EN 45545-2 approved.

Operating temperature range: -40°C to +130°C

Family	Size mm	Type		Legends per sheet	Quantity	SW code
		white	yellow			
MG-TAP-R	15 x 27	37094	37044	8	240	354
	15 x 49	37095	37045	4	120	355




MG-TAP-R-MD

NEW

Tags produced in metal-detectable material that can be inserted into transparent holders. The material has a specific additive easily detectable by metal detectors and X-rays, which guarantees high resistance to oxidation.

Material: PC/AB, self extinguishing class HB: according to UL94.

Operating temperature range: -40°C to +130°C

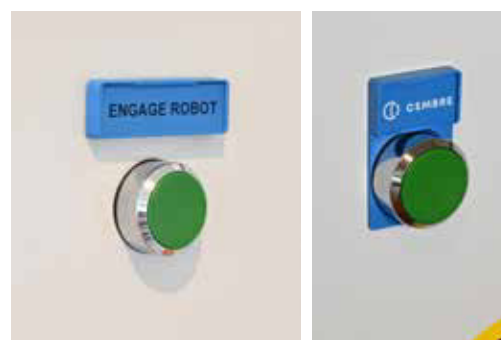

Family	Size mm	Type		Legends per sheet	Quantity	SW code
		NEW Type blue MD				
MG-TAP-R-MD	15 x 27	37064-MD		8	240	354
	15 x 49	37065-MD		4	120	355



template with PET support.....	page 12
ribbons	page 13
legend holders PMF-ET.....	page 126
legend holders PMF-ET.....	page 126

legend holders PMT-AC.....	page 127
push button legend bases PTP.....	page 140
legend bases PL.....	page 141
legend rails RT-TAP.....	page 144

