

# RIBBONS

## Monochrome ribbons


for thermal transfer printer

MG2-ETR monochrome ribbons are formulated to produce high quality print on a variety of materials while providing resistance to abrasion, chemicals, cleaning products and environmental agents (eg UV, humidity). Ribbon length 200 m, width 120 mm.

MG2-EPTR PREMIUM black monochrome ribbon has enhanced performance characteristics, is 300 linear meters long, with a width of 110 mm.

To enable usage of MG2-EPTR PREMIUM ribbons with MG4 printers, the additional purchase of accessory Rear Tension Roller Kit MG2-SPD1 with smaller diameter is required (see Accessories page 10).

**Use this ribbon to print FLAT Polycarbonate items.**

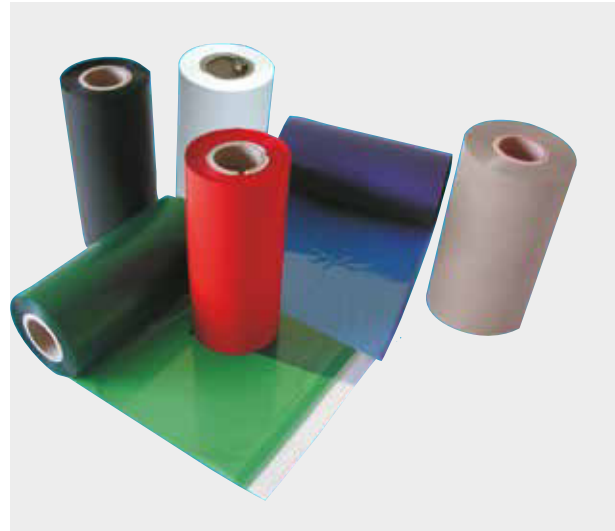

Family	Type							Width mm	Length m	Quantity
	black	blue	red	green	silver	gold	white			
MG2-ETR	991600	991601	991602	991603	991607	991608	991606	120	200	1
MG2-EPTR PREMIUM	991611							110	300	1

The legibility of print produced on CEMBRE media by MG2-ETR and MG2-EPTR black ribbons meets the requirements of:

- UNI EN ISO 4892-2:** UV resistance
  - CEI 16-7:** Resistance to abrasion and friction
  - CEI 16-7:** Effect of ageing
  - CEI 23-11 / CEI EN 61058-1:** Indelibly
  - CEI EN 61010-1 / VDE 0411-1:** Indelibly
  - CEMBRE INTERNAL TEST:** Indelibly
  - UNI EN ISO 9227:** Saline mist
  - CEI EN 60464-2:** Resistance to solvent vapour
  - DIN 30643:** Resistance to abrasion and rubbing
  - UNI EN ISO 175:** Effect of immersion in liquid chemicals
- Specifications page 192

