

## ANAMET HEAT PROTECTION PRODUCTS

## PROTECTION SLEEVE TYPE HIPOJACKET AERO



### Hiprojacket® Aero: Braided sleeving, solid constructed acc. SAE AS1072, superior short term flame protection.

The ultimate heatprotection for cables and hoses. This solid braided glassfiber sleeving, with thick silicone cover, is constructed according to the Aerospace Standard SAE AS1072 and allows qualified hose assemblies to pass the AS1055 testing. This Hiprojacket offers superior short term flame protection and excellent temperature reduction. In the field of cable protection, a complete program of Hiprojacket fittings is available for easy installation. Resistant to hydraulic fluids, lubricating oils and fuels, Hiprojacket protects against molten splash, occasional flames, heat radiation, energy loss in piping and hoses; also protects employees from burns. Hiprojacket is typically used in the Aerospace-industry, steelworks, glass and ceramics industry, as well as in the machine- and apparatus-building.

#### Material & Construction:

**Construction:** Braided sleeving from E-glass yarns, solid constructed acc. Aerospace Standard SAE AS1072 type 2.  
**Cover specifications:** Iron-oxide silicon rubber. Excel-



lent oil resistant, halogen-free, superior short term flame protection, excellent temperature reduction and withstands molten splash.

**Special approvals:** Highly flameretardant acc. DIN 5510-2: S4/SR2/ST.2. Ox. index LOI = 39,2. Flameretardant acc. UNI CEI 11170-3; NF EN ISO 11925-2 (15 and 30 sec.). EN 45545 R23 and R24 HL1/HL2/HL3; NF F 16-101 class I2 F1. , Oxygenindex LOI = 39,2. Allows qualified hose assemblies to pass the SAE AS1055 testing.

**Temperature:** -55 °C till +260 °C continuous.

Under flame till +800 °C for approx. 20 minutes.

Radiation heat till +800 °C for approx. 20 minutes.

Molten metal splash till +1640 °C for 15-30 seconds.

**Colour:** Red, other colours available on demand.



Hiprojacket Aero			Diametre		Standard carton		Small carton *		Random Length		Weight
Size	Size	Type	Inside	Outside	Metre	Article No.	Metre	Article No.	Metre	Article No.	(Kg/m)
(mm)	(Inch)		(mm)	(mm)		Red		Red		Red	
6	1/4"	HJ-04	6	11	30	336.006.3	15	336.006.1	1	336.006.0	0,12
10	3/8"	HJ-06	10	15	30	336.010.3	15	336.010.1	1	336.010.0	0,16
13	1/2"	HJ-08	13	18	30	336.013.3	15	336.013.1	1	336.013.0	0,19
16	5/8"	HJ-10	16	22	30	336.016.3	15	336.016.1	1	336.016.0	0,21
19	3/4"	HJ-12	19	25	30	336.019.3	15	336.019.1	1	336.019.0	0,24
22	7/8"	HJ-14	22	28	30	336.022.3	15	336.022.1	1	336.022.0	0,28
25	1"	HJ-16	25	31	30	336.025.3	15	336.025.1	1	336.025.0	0,33
29	1.1/8"	HJ-18	29	35	30	336.029.3	15	336.029.1	1	336.029.0	0,35
32	1.1/4"	HJ-20	32	38	30	336.032.3	15	336.032.1	1	336.032.0	0,39
35	1.3/8"	HJ-22	35	41	30	336.035.3	15	336.035.1	1	336.035.0	0,45
38	1.1/2"	HJ-24	38	44	30	336.038.3	15	336.038.1	1	336.038.0	0,48
41	1.5/8"	HJ-26	41	47	30	336.041.3	15	336.041.1	1	336.041.0	0,52
44	1.3/4"	HJ-28	44	50	30	336.044.3	15	336.044.1	1	336.044.0	0,64
51	2"	HJ-32	51	57	30	336.051.3	15	336.051.1	1	336.051.0	0,67
57	2.1/4"	HJ-36	57	63	30	336.057.3	15	336.057.1	1	336.057.0	0,74
64	2.1/2"	HJ-40	64	70	30	336.064.3	15	336.064.1	1	336.064.0	0,75
70	2.3/4"	HJ-44	70	76	30	336.070.3	15	336.070.1	1	336.070.0	0,88
76	3"	HJ-48	76	82	30	336.076.3	15	336.076.1	1	336.076.0	1,03
83	3.1/4"	HJ-52	83	89	30	336.083.3	15	336.083.1	1	336.083.0	1,13
89	3.1/2"	HJ-56	89	95	30	336.089.3	15	336.089.1	1	336.089.0	1,18
95	3.3/4"	HJ-60	95	101	30	336.095.3	15	336.095.1	1	336.095.0	1,34
102	4"	HJ-64	102	108	30	336.102.3	15	336.102.1	1	336.102.0	1,41

\* In the 15 meter packaging it is possible that 2 lengths (totally 15 meter) are packed (minimum shortest length 4,5 meter).

The fittings for Hiprojacket are outlined on page 10-07.





Hiprojacket® Aero:  
Braided sleeving, solid constructed  
acc. SAE AS1072, superior short term  
flame protection.



Hiprojacket Aero			Diametre		Standard carton		Small carton		Reels		Weight
Size	Size	Type	Inside	Outside	Metre	Article No.	Metre	Article No.	Metre	Article No.	(Kg/m)
(mm)	(Inch)		(mm)	(mm)		Black		Black		Black	
13	1/2"	HJ-08	13	18	30	346.913.3	-	-	-	-	0,19
16	5/8"	HJ-10	16	22	30	346.916.3	-	-	-	-	0,21
19	3/4"	HJ-12	19	25	30	346.919.3	-	-	-	-	0,24
29	1.1/8"	HJ-18	29	35	30	346.929.3	-	-	-	-	0,35
35	1.3/8"	HJ-22	35	41	30	346.935.3	-	-	-	-	0,45
38	1.1/2"	HJ-24	38	44	30	346.938.3	-	-	-	-	0,48
41	1.5/8"	HJ-26	41	47	30	346.941.3	-	-	-	-	0,52
51	2"	HJ-32	51	57	30	346.951.3	-	-	-	-	0,67

**ANAMET HEAT  
PROTECTION  
PRODUCTS**

**PROTECTION  
SLEEVE TYPE  
HIPROJACKET  
AERO**



**Hiprojacket® Industrial:**  
**Knitted sleeving, good short term flame protection.**

The industrial alternative for less demanding situations. This Industrial Grade has a more open construction of glass fibre, but due to the thick silicon cover still offers good short term flame protection and temperature reduction. Resistant to hydraulic fluids, lubricating oils and fuels, Hiprojacket Industrial protects against molten splash, occasional flames, heat radiation, energy loss in piping and hoses; also protects employees from burns. Hiprojacket Industrial is frequently used to protect cables and industrial rubber/metal hoses in the glass, ceramics and steel industry, as well as in the machine- and apparatus-building.

good temperature reduction and withstands molten splash.  
**Temperature:** -55 °C till +260 °C continuous.  
 Under flame till +800 °C for approx. 20 minutes.  
 Radiation heat till +800 °C for approx. 20 minutes.  
 Molten metal splash till +1640 °C for 15-30 seconds.  
**Colour:** Red, other colours available on demand.

**Material & Construction:**

**Construction:** Knitted sleeving from E-glass yarns.  
**Cover specifications:** Iron-oxide silicon rubber, excellent oil resistant, halogen-free, good short term flame protection,



**ANAMET HEAT PROTECTION PRODUCTS**

**PROTECTION SLEEVE TYPE HIPOJACKET INDUSTRIAL**

Hiprojacket Industrial			Diametre		Standard carton		Small carton		Reels		Weight
Size	Size	Type	Inside	Outside	Metre	Article No.	Metre	Article No.	Metre	Article No.	(Kg/m)
(mm)	(Inch)		(mm)	(mm)		Red		Red		Red	
6	1/4"	HJ-I-04	6	11	30	336.806.3	-	-	-	-	0,11
10	3/8"	HJ-I-06	10	15	30	336.810.3	-	-	-	-	0,14
13	1/2"	HJ-I-08	13	18	30	336.813.3	-	-	-	-	0,17
16	5/8"	HJ-I-10	16	22	30	336.816.3	-	-	-	-	0,22
19	3/4"	HJ-I-12	19	25	30	336.819.3	-	-	-	-	0,25
22	7/8"	HJ-I-14	22	28	30	336.822.3	-	-	-	-	0,26
25	1"	HJ-I-16	25	31	30	336.825.3	-	-	-	-	0,30
29	1.1/8"	HJ-I-18	29	35	30	336.829.3	-	-	-	-	0,34
32	1.1/4"	HJ-I-20	32	38	30	336.832.3	-	-	-	-	0,36
35	1.3/8"	HJ-I-22	35	41	30	336.835.3	-	-	-	-	0,48
38	1.1/2"	HJ-I-24	38	44	30	336.838.3	-	-	-	-	0,53
41	1.5/8"	HJ-I-26	41	47	30	336.841.3	-	-	-	-	0,53
44	1.3/4"	HJ-I-28	44	50	30	336.844.3	-	-	-	-	0,55
51	2"	HJ-I-32	51	57	30	336.851.3	-	-	-	-	0,62
57	2.1/4"	HJ-I-36	57	63	30	336.857.3	-	-	-	-	0,71
64	2.1/2"	HJ-I-40	64	70	30	336.864.3	-	-	-	-	0,73
70	2.3/4"	HJ-I-44	70	76	30	336.870.3	-	-	-	-	0,82
76	3"	HJ-I-48	76	82	30	336.876.3	-	-	-	-	0,93
83	3.1/4"	HJ-I-52	83	89	30	336.883.3	-	-	-	-	1,14
89	3.1/2"	HJ-I-56	89	95	30	336.889.3	-	-	-	-	1,15
95	3.3/4"	HJ-I-60	95	100	30	336.895.3	-	-	-	-	1,17
102	4"	HJ-I-64	102	108	30	336.897.3	-	-	-	-	1,22
114	4.1/2"	HJ-I-72	114	120	30	336.898.3	15	336.898.1	-	-	1,65
127	5"	HJ-I-80	127	133	30	336.899.3	15	336.899.1	-	-	1,71

The fittings for Hiprojacket are outlined on page 10-07.





**Hiprojacket® Industrial:**  
Knitted sleeving, good short term  
flame protection.

Hiprojacket Industrial			Diametre		Standard carton		Small carton		Reels		Weight (Kg/m)
Size (mm)	Size (Inch)	Type	Inside (mm)	Outside (mm)	Metre	Article No. Black	Metre	Article No. Black	Metre	Article No. Black	
13	1/2"	HJ-I-08	13	18	30	346.313.3	-	-	-	-	0,17
16	5/8"	HJ-I-10	16	22	30	346.316.3	-	-	-	-	0,22
19	3/4"	HJ-I-12	19	25	30	346.319.3	-	-	-	-	0,25
29	1.1/8"	HJ-I-18	29	35	30	346.329.3	-	-	-	-	0,34
35	1.3/8"	HJ-I-22	35	41	30	346.335.3	-	-	-	-	0,48
41	1.5/8"	HJ-I-26	41	47	30	306.341.3	-	-	-	-	0,53
51	2"	HJ-I-32	51	57	30	346.351.3	-	-	-	-	0,62



Hiprojacket Industrial			Diametre		Standard carton		Small carton		Reels		Weight (Kg/m)
Size (mm)	Size (Inch)	Type	Inside (mm)	Outside (mm)	Metre	Article No. Grey	Metre	Article No. Grey	Metre	Article No. Grey	
13	1/2"	HJ-I-08	13	18	30	346.013.3	-	-	-	-	0,17
16	5/8"	HJ-I-10	16	22	30	346.016.3	-	-	-	-	0,22
19	3/4"	HJ-I-12	19	25	30	346.019.3	-	-	-	-	0,25
29	1.1/8"	HJ-I-18	29	35	30	346.029.3	-	-	-	-	0,34
35	1.3/8"	HJ-I-22	35	41	30	346.035.3	-	-	-	-	0,48
41	1.5/8"	HJ-I-26	41	47	30	306.041.3	-	-	-	-	0,53
51	2"	HJ-I-32	51	57	30	346.051.3	-	-	-	-	0,62



Hiprojacket Industrial			Diametre		Standard carton		Small carton		Reels		Weight (Kg/m)
Size (mm)	Size (Inch)	Type	Inside (mm)	Outside (mm)	Metre	Article No. Blue	Metre	Article No. Blue	Metre	Article No. Blue	
13	1/2"	HJ-I-08	13	18	30	346.113.3	-	-	-	-	0,17
16	5/8"	HJ-I-10	16	22	30	346.116.3	-	-	-	-	0,22
19	3/4"	HJ-I-12	19	25	30	346.119.3	-	-	-	-	0,25
29	1.1/8"	HJ-I-18	29	35	30	346.129.3	-	-	-	-	0,34
35	1.3/8"	HJ-I-22	35	41	30	346.135.3	-	-	-	-	0,48
41	1.5/8"	HJ-I-26	41	47	30	306.141.3	-	-	-	-	0,53
51	2"	HJ-I-32	51	57	30	346.151.3	-	-	-	-	0,62



Hiprojacket Industrial			Diametre		Standard carton		Small carton		Reels		Weight (Kg/m)
Size (mm)	Size (Inch)	Type	Inside (mm)	Outside (mm)	Metre	Article No. Yellow	Metre	Article No. Yellow	Metre	Article No. Yellow	
13	1/2"	HJ-I-08	13	18	30	346.213.3	-	-	-	-	0,17
16	5/8"	HJ-I-10	16	22	30	346.216.3	-	-	-	-	0,22
19	3/4"	HJ-I-12	19	25	30	346.219.3	-	-	-	-	0,25
29	1.1/8"	HJ-I-18	29	35	30	346.229.3	-	-	-	-	0,34
35	1.3/8"	HJ-I-22	35	41	30	346.235.3	-	-	-	-	0,48
41	1.5/8"	HJ-I-26	41	47	30	306.241.3	-	-	-	-	0,53
51	2"	HJ-I-32	51	57	30	346.251.3	-	-	-	-	0,62




## Anaconda nickel plated brass fittings for Hiprojacket®.

To fit the Hiprojacket you can use the standard Anaconda fittings (which are being used for metal conduits Sealtite), if you replace their standard polyamide clamping rings with the special metal clamping rings mentioned here under. The fittings are also available in 45°, 90° and in stainless steel (see also chapter 4 and 6).

### Material & Construction:

**Construction:** Nickel plated brass fitting, consisting of 4 parts (counter nut, clamping ring, ferrule and body).

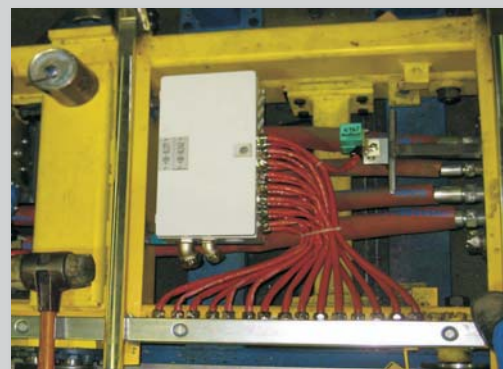

**Material:** Counter nut, body, clamping ring and ferrule are nickel plated brass with exception of size 3/8" till 1" where the ferrule is from galvanised steel. Inserts are made from PA6 (red for ISO metric, blue for Pg and white for NPT).

**Temperature:** -45 °C till +105 °C continuous (cable-hose-fittings till +300 °C on request).

**Protection class:** IP 54 (dust-protected, splash water-proof), additionally sealed with Hiprosiltape, IP 67 is possible.


**Colour:** Metal.

## Clamping ring, zinc plated brass, for combination with Hiprojacket.




Hiprojacket type		Fitting thread size			Standard Package	Article Number	Weight (Kg/100)	
Size (mm)	Aero	Industrial	ISO	Pg				NPT
13 / 10	HJ-08	HJ-I-06	M16 x 1,5	Pg 11	1/2" NPT	10	817.512.0	0,6
16 / 13	HJ-10	HJ-I-08	M20 x 1,5	Pg 16	1/2" NPT	10	817.516.0	0,6
22 / 19	HJ-14	HJ-I-12	M25 x 1,5	Pg 21	3/4" NPT	5	817.520.0	1,0
25	HJ-16	HJ-I-16	M32 x 1,5	Pg 29	1" NPT	5	817.526.0	1,2
35 / 32	HJ-22	HJ-I-20	M40 x 1,5	Pg 36	1.1/4" NPT	2	817.535.0	2,0
38	HJ-24	HJ-I-24	M50 x 1,5	Pg 42	1.1/2" NPT	2	817.540.0	4,2
51	HJ-32	HJ-I-32	M63 x 1,5	Pg 48	2" NPT	2	817.550.0	9,0

## ISO straight fitting, male, nickel plated brass (without clamping ring).



Thread	Hiprojacket type		Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
	Aero	Industrial	A	B	C	D	E			
M16 x 1,5	HJ-08	HJ-I-06	35	12	26	-	24	10	812.016.1	4,7
M20 x 1,5	HJ-10	HJ-I-08	37	13	29	-	27	10	812.020.1	5,1
M25 x 1,5	HJ-14	HJ-I-12	40	15	35	-	33	5	812.025.1	11,7
M32 x 1,5	HJ-16	HJ-I-16	46	15	45	-	43	5	812.032.1	19,7
M40 x 1,5	HJ-22	HJ-I-20	52	16	54	-	52	2	812.040.1	35,0
M50 x 1,5	HJ-24	HJ-I-24	56	18	63	-	60	2	812.050.1	42,2
M63 x 1,5	HJ-32	HJ-I-32	66	20	77	-	74	2	812.063.1	52,8

## Pg straight fitting, male, nickel plated brass (without clamping ring).



Thread	Hiprojacket type		Dimensions in mm					Standard Package	Article Number	Weight (Kg/100)
	Aero	Industrial	A	B	C	D	E			
Pg 11	HJ-08	HJ-I-06	35	12	26	-	24	10	810.011.1	4,7
Pg 16	HJ-10	HJ-I-08	37	13	29	-	27	10	810.016.1	5,1
Pg 21	HJ-14	HJ-I-12	40	15	35	-	33	5	810.021.1	11,7
Pg 29	HJ-16	HJ-I-16	46	15	45	-	43	5	810.029.1	19,7
Pg 36	HJ-22	HJ-I-20	52	16	54	-	52	2	810.036.1	35,0
Pg 42	HJ-24	HJ-I-24	56	18	63	-	60	2	810.042.1	42,2
Pg 48	HJ-32	HJ-I-32	66	20	77	-	74	2	810.048.1	52,8





**Hiproject® Light:**  
**Lightweight sleeving, moderate thermal protection.**

The most economic alternative for less demanding situations. This Light Grade has a thinner construction of glass fibre and silicone rubber cover, but due to the thin silicon cover offers some short term flame protection and a small temperature reduction. Resistant to hydraulic fluids, lubricating oils and fuels, Hiproject Light offers limited protection against molten splash and occasional flames. Hiproject Light is frequently used to protect cables and wires in the machine- and apparatus-building.

**Temperature:** -55 °C till +260 °C continuous.  
 Under flame till +538 °C for approx. 20 minutes.  
 Radiation heat till +538 °C for approx. 20 minutes.  
 Molten metal splash till +1200 °C for 15-30 seconds.  
**Colour:** Red.

**Material & Construction:**

**Construction:** Knitted sleeving from E-glass yarns.  
**Cover specifications:** Iron-oxide silicon rubber. Excellent oil resistant, halogen-free, limited short term flame protection, limited temperature reduction.



Hiproject Light			Diametre		Standard carton		Small carton		Reels		Weight
Size	Size	Type	Inside	Outside	Metre	Article No.	Metre	Article No.	Metre	Article No.	(Kg/m)
(mm)	(Inch)		(mm)	(mm)		Red		Red		Red	
4	5/32"	HJ-L-02	4	6	100	355.004.5	-	-	-	-	0,01
6	1/4"	HJ-L-04	6	8	100	355.006.5	-	-	-	-	0,02
8	5/16"	HJ-L-05	8	10	100	355.008.5	-	-	-	-	0,03
10	3/8"	HJ-L-06	10	12	100	355.010.5	-	-	-	-	0,03
12	1/2"	HJ-L-08	12	14	100	355.012.5	-	-	-	-	0,04
16	5/8"	HJ-L-10	16	18	50	355.016.5	-	-	-	-	0,06
20	3/4"	HJ-L-12	20	22	50	355.020.5	-	-	-	-	0,08

**ANAMET HEAT PROTECTION PRODUCTS**

**PROTECTION SLEEVE TYPE HIPOJACKET LIGHT**